


MATERIAL TEST REPORT

Finish Name	HR BLACK
Finish Code	CS-01
Material	MILD STEEL

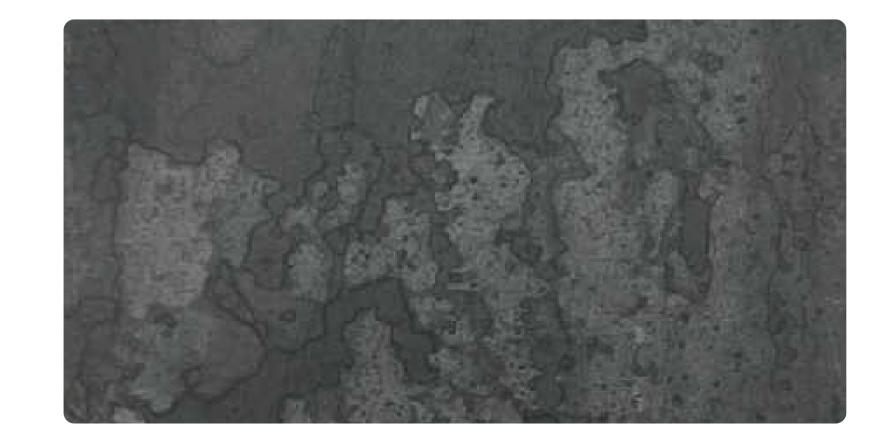

Application	Indoor <	Covered Outdoor	Exposed Outdoor	Seaside
-------------	----------	-----------------	-----------------	---------


TEST	RANGE	RESULT	METHOD
BOND TEST	2 - 3 N/mm2	3.2	Bond strength is a measure of the adhesive strength of a coating to its substrate by adhering a metal dolly to the surface of the test panel to be tested and pulling the dolly away from the surface, perpendicular to the surface by using a pull off apparatus.
SCRATCH RESISTENCE TEST	1300 g - 1500 g	1700 g	Scratch test is conducted to determine the resistance of the coating to penetration by scratching with a scratch stylus loaded with 1800g of load.
SALT SPRAY TEST	200 - 300 hours	300+	Salt spray testing is an accelerated corrosion test that produces a corrosive attack to coated samples in order to evaluate the suitability of the coating when exposed to salt spray for 500 hours.
WEATHER RESISTENCE TEST	200 - 300 hours	300+	UV Resistance is a accelerated weathering test conducted on coating material to determine its ability to withstand the effect of sun light when exposed to radiation for 500 hours.

Protective Coating Thickness 40 - 60 Microns

Conclusion:

HR Black finish on **MILD STEEL** is suitable for **Indoor** usage as it has passed all tests and results are within the permissable range.

Certified By Metal Fabrik:

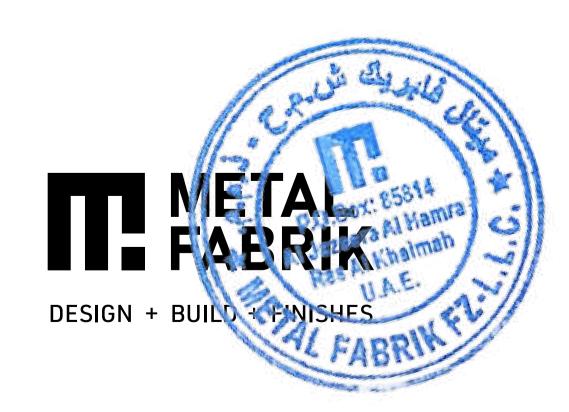

Disclaimer: • All tests are conducted at govt. certified laboratory in the UAE on similar finishes / equivalent processes.

- All tests are in compliance with ISO/IEC 17025 : 2007 standards to ensure quality product & testing / calibration services.
- Color Fading Interior 0-5% in 3 years. Covered Exterior 5 7% in 2 years. Exposed Exterior 5 10% in 2 years. Seaside 5 15% in 2 years.